THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF PANORAMA ANTENNAS LTD.

© 2009 A4

DO NOT SCALE

PROJECTION

DRG. No. SC1-FME-JC10-VAR

PART No.	PACKING REQUIREMENTS
SC1-FME-JC10	ONE KIT PER BAG
SC1-FME-JC10BULK	INDIVIDUAL COMPONENTS PACKED 100 PER PACK

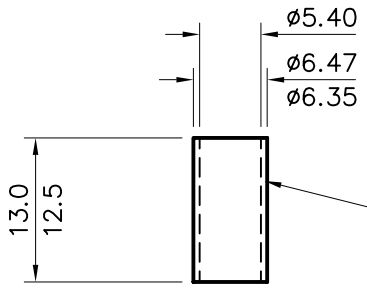

COPPER CRIMP TUBE NICKEL PLATED

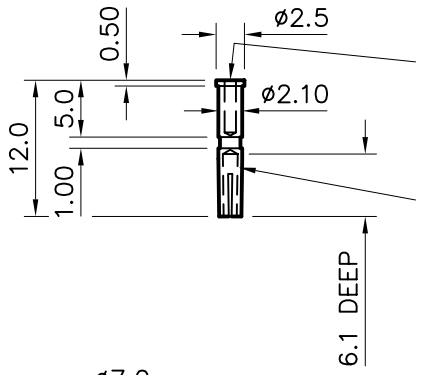

HOLE ø1.10 x5.0 DEEP

FME FEMALE CONTACT BERYLLIUM-COPPER TYPE CuBe2 GOLD PLATED OR GOOD QUALITY BRASS.

DIMENSIONS OF RG 58 CABLE PREPARED FOR ASSEMBLY

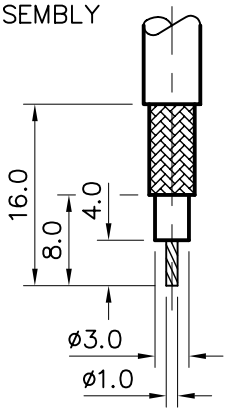

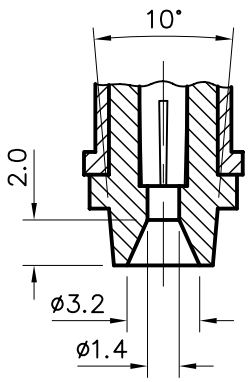

ENLARGED DETAIL OF INSULATOR

IMPORTANT:-
FEMALE CONTACT PIN MUST REMAIN CAPTIVE AFTER ASSY. OF CONNECTOR.

ALL MATERIALS USED MUST BE RoHS COMPLIANT.

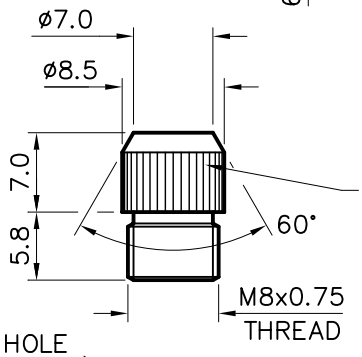

STRAIGHT KNURLED LOCKING BUSH BRASS NICKEL PLATED.

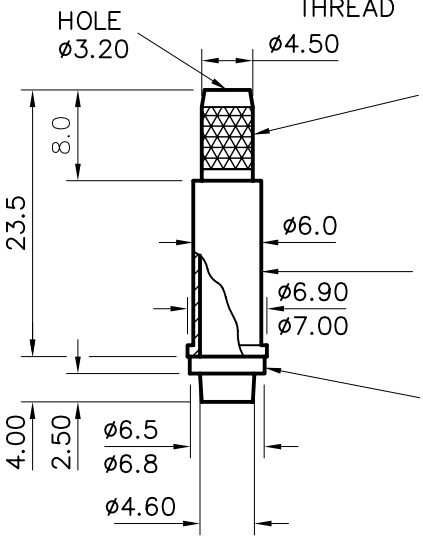

COARSE DIAMOND KNURL 1mm PITCH APPROX.

EARTHING SHELL BRASS NICKEL PLATED

INSULATOR-DELRIN OR EQUIVALENT

FINAL CONNECTOR ASSY. MUST CONFORM TO THESE STANDARD INTERFACE DIMENSIONS

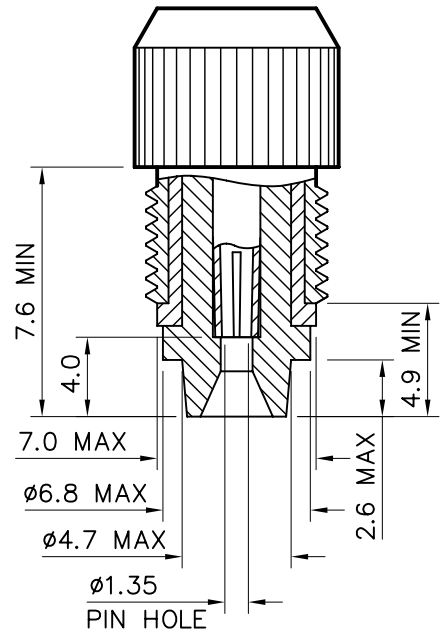

△ — DENOTES LATEST ISSUE CHANGES

C/NOTE	ISSUE	DATE	APPROVAL
01499	4	3.10.00	K.D.
01742	5	20.12.00	K.D.
00565	6	18.7.01	K.D.
01879	7	12.11.08	K.D.
01019	8	6.2.09	A.J.
01019	9	02.02.10	K.D.

TOLERANCES UNLESS OTHERWISE STATED
0 DEC. PLACE ±0.5 2 DEC. PLACES ±0.1
1 DEC. PLACE ±0.2 ANGULAR ±1°

MATERIAL
SEE DRAWING

FINISH

TITLE
FME JACK FOR RG58 COAX NICKEL PLATED

DRAWN	DO.CHECK	SCALE	DIMENSIONS IN mm
A.G.	A.J.	N.T.S.	

PANORAMA ANTENNAS