

	3RD ANGLE PROJECTION		DO NOT SCALE
	DENOTES LATEST ISSUE CHANGES		DENOTES CRITICAL VALUE
TOLERANCES UNLESS OTHERWISE STATED			
0 DEC. PLACE	±0.5	2 DEC. PLACES	±0.1
1 DEC. PLACE	±0.2	ANGULAR	±1°

© 2015 A4 THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE WRITTEN CONSENT OF PANORAMA ANTENNAS LTD.

DRG. No. C29NP-VARNP

PART No	'L' mm	TOL. -mm	WEIGHT (g)
C29NP-03NP	300	+20/-0	24
C29NP-035NP	350	+20/-0	25
C29NP-04NP	400	+20/-0	27
C29NP-06NP	600	+20/-0	33
C29NP-08NP	800	+20/-0	40
C29NP-09NP	900	+30/-0	43
C29NP-1-8NP	1800	+30/-0	72
C29NP-2NP	2000	+30/-0	78
C29NP-3NP	3000	+100/-0	110
C29NP-5NP	5000	+100/-0	174
C29NP-6NP	6000	+100/-0	206
C29NP-10NP	10000	+100/-0	334

CABLE SPECIFICATION VALUES:


- CHARACTERISTIC IMPEDANCE:-
50Ω ±2Ω @ 1GHz
50Ω ±4Ω @ 2GHz
- ATTENUATION:-
NO GREATER THAN 3dB PER 10m AT 1 GHz.
NO GREATER THAN 4.5dB PER 10m AT 2GHz.
- BRAID RESISTANCE PER 10m LESS THAN 160mΩ.
- SHIELDING EFFECTIVENESS ACCORDING TO IEC61196 TO BE < -85dB AT 30-10000 MHz.

SPECIFICATION NOTES:

- ELECTRICAL TEST - EACH CABLE.
CENTRE CONDUCTOR/OUTER SCREEN ISOLATION 1KV MIN.
CENTRE CONDUCTOR END TO END TEST.
- TENSILE PULL TEST SAMPLE/ASSEMBLY PER 3000 BATCH.
PULLING LOAD - CONNECTOR BODY - 5Kg.
PULLING LOAD - CENTRE PIN - 2Kg.
- CS29 CABLE PERFORMANCE TEST SAMPLE PER 10000 m BATCH.
IMPEDANCE 50Ω ±2Ω @ 1GHz. & 50Ω ±4Ω @ 2GHz.
LOSS NO GREATER THAN 0.3dB/m @ 1GHz. & 0.45dB/m @ 2.4GHz.

GENERAL NOTES:-

- ALL PARTS MUST BE RoHS COMPLIANT AND MUST NOT CONTAIN ANY SUBSTANCES OF VERY HIGH CONCERN (SVHCs) LISTED UNDER REACH OR POLY-AROMATIC HYDROCARBONS (PAHs), OR PERSISTENT ORGANIC POLLUTANTS (POPs) CONTROLLED BY THE STOCKHOLM CONVENTION.
- CABLE SHEATH TO BE BLACK, UV STABILISED PACREL 6385N TPE.
- PRINTING MUST BE DURABLE AND ENVIRONMENTALLY RESISTANT.
- CONNECTORS MUST CONFORM TO STANDARD INTERFACE DIMENSIONS.
- SAMPLES MUST BE APPROVED BY PANORAMA ANTENNAS Q.C. BEFORE COMMENCING PRODUCTION.
- IN ORDER TO ASSURE COMPLIANCE WITH THE U.S. DODD-FRANK ACT (SECTION 1502) TIN, GOLD, TANTALUM & TUNGSTEN CONTAINED IN PANORAMA PRODUCTS MUST BE BULLY TRACEABLE TO A SMELTER APPROVED BY THE CONFLICT FREE SOURCING INITIATIVE (www.conflictreesmelter.org)

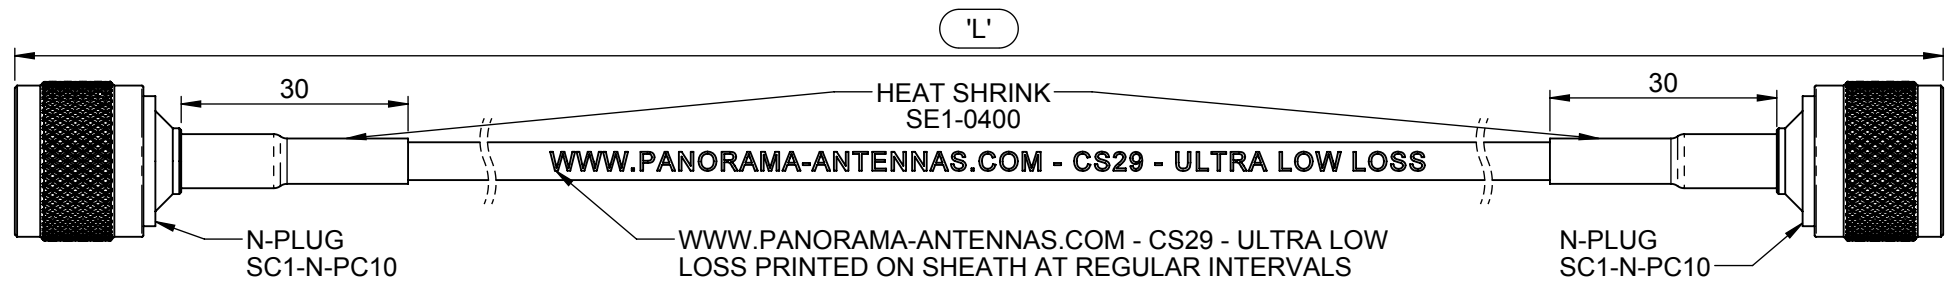

PRODUCT/ASSEMBLY CABLES AND CABLE ASSEMBLIES		DESCRIPTION N PLUG(m) TO N PLUG(m) CS29 CABLE ASSEMBLY - VARIOUS LENGTHS.			
MATERIAL N/A		APPROVED KD	DO.CHECK AR	SCALE 1:1	DIMENSIONS IN mm
FINISH N/A					
WEIGHT	SEE TABLE				

01019	-1	REDRAWN IN 2D AND 3D	28/04/2015	IC
PCN	REV.	DESCRIPTION OF CHANGE	DATE	DRAWN
REVISIONS				