

TOLERANCES UNLESS OTHERWISE STATED			
0 DEC. PLACE	±0.5	2 DEC. PLACES	±0.1
1 DEC. PLACE	±0.2	ANGULAR	±1°

CABLE SPECIFICATION VALUES:


- DIMENSIONS AND CONSTRUCTION TYPICAL OF JIS 1.5D-2V OR RG174A.
- DIELECTRIC MATERIAL - CROSSLINK POLYTHENE.
- IMPEDANCE:- 50Ω
- ATTENUATION:- 1.25 dB/m AT 1.575 GHz.

SPECIFICATION NOTES:

- MINIMUM CONNECTOR PULL OFF FORCE- 50N.

GENERAL NOTES:-

- ALL PARTS MUST BE RoHS COMPLIANT AND MUST NOT CONTAIN ANY SUBSTANCES OF VERY HIGH CONCERN (SVHCs) LISTED UNDER REACH OR POLY-AROMATIC HYDROCARBONS (PAHs), OR PERSISTENT ORGANIC POLLUTANTS (POPs) CONTROLLED BY THE STOCKHOLM CONVENTION.
- CABLE SHEATH TO BE BLACK, UV STABILISED PACREL 6385N TPE.
- PRINTING MUST BE DURABLE AND ENVIRONMENTALLY RESISTANT.
- CONNECTORS MUST CONFORM TO STANDARD INTERFACE DIMENSIONS.
- SAMPLES MUST BE APPROVED BY PANORAMA ANTENNAS Q.C. BEFORE COMMENCING PRODUCTION.
- IN ORDER TO ASSURE COMPLIANCE WITH THE U.S. DODD-FRANK ACT (SECTION 1502) TIN, GOLD, TANTALUM & TUNGSTEN CONTAINED IN PANORAMA PRODUCTS MUST BE FULLY TRACEABLE TO A SMELTER APPROVED BY THE CONFLICT FREE SOURCING INITIATIVE (www.conflictfreesmelter.org).

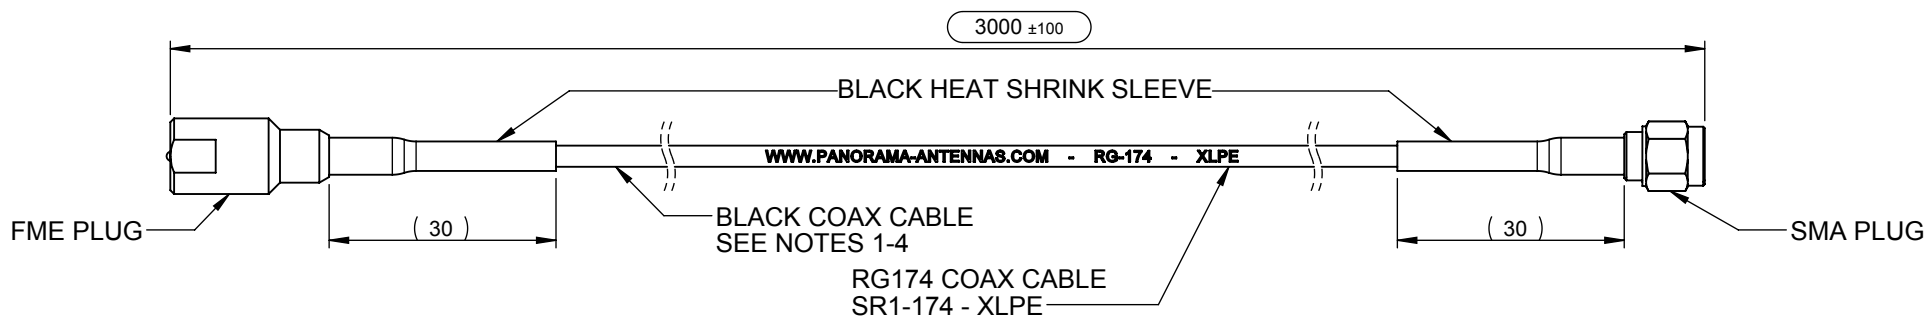

PRODUCT/ASSEMBLY CABLES AND CABLE ASSEMBLIES		DESCRIPTION FME(m) - SMA(m) RG174 COAX CABLE 3m LONG			
MATERIAL N/A		APPROVED KD	DO.CHECK AR	SCALE 1:1	DIMENSIONS IN mm
FINISH N/A					
WEIGHT 45g	SHEET 1 OF 1				

01019	1	PRODUCTION ISSUE	20/05/2015	IC
PCN	REV.	DESCRIPTION OF CHANGE	DATE	DRAWN
REVISIONS				