




TOLERANCES UNLESS OTHERWISE STATED			
0 DEC. PLACE	±0.5	2 DEC. PLACES	±0.1
1 DEC. PLACE	±0.2	ANGULAR	±1°

**CABLE SPECIFICATION NOTES:**

1. DIMENSIONS AND CONSTRUCTION TYPICAL OF JIS 1.5D-2V OR RG174A.
2. DIELECTRIC MATERIAL - CROSSLINK POLYTHENE.
3. IMPEDENCE- 50Ω.
4. ATTENUATION- 1.25dB/m @1.575GHz.

**GENERAL NOTES:**

1. MINIMUM CONNECTOR PULL OFF FORCE- 50N.
2. OUTER SHEATH- P.V.C. LEVEL OF DEHP IN P.V.C. MUST BE <1000PPM.
3. CONNECTORS MUST CONFORM TO STANDARD INTERFACE DIMENSIONS SHOWN IN DETAIL 1 & 2.
4. ALL MATERIALS MUST BE RoHS COMPLIANT.
5. SAMPLES TO BE APPROVED BY PANORAMA ANTENNAS Q.C. BEFORE COMMENCING PRODUCTION.

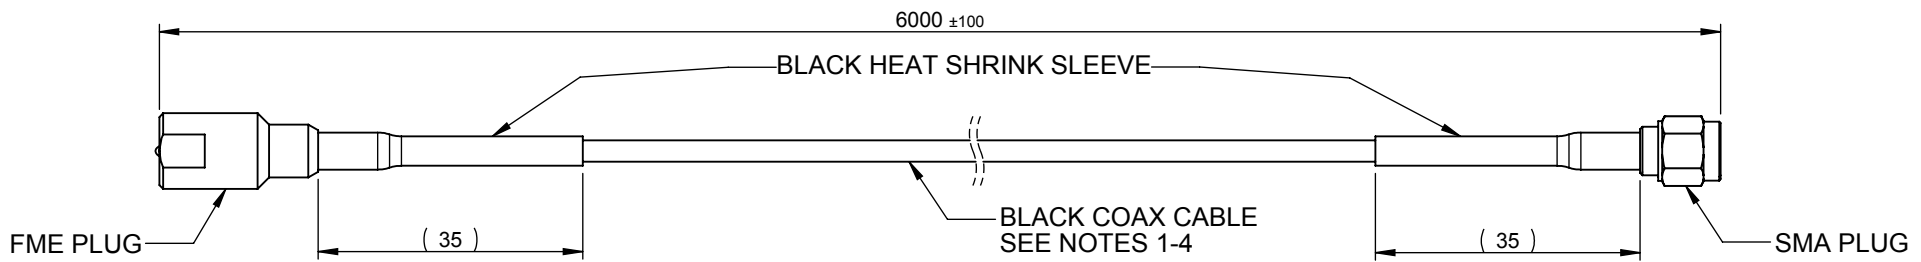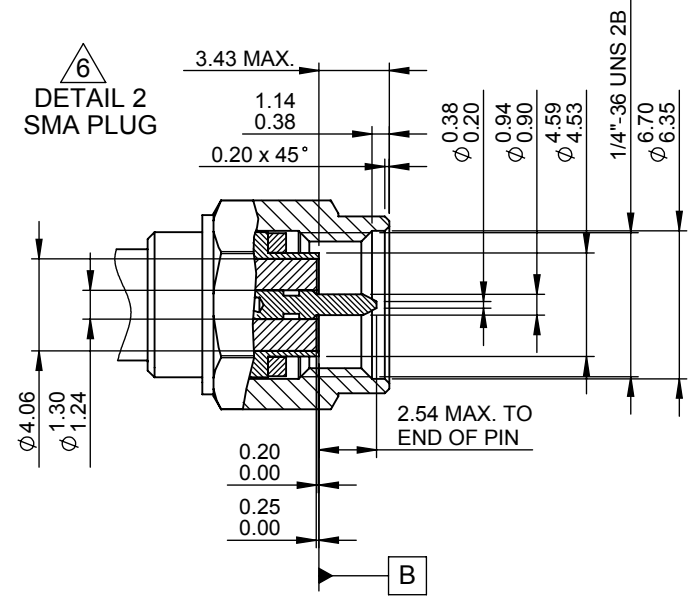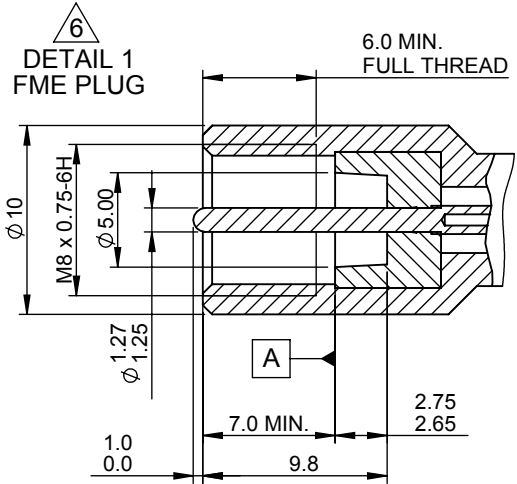

01019	6	REDRAWN IN 2D AND 3D. NOTES & INTERFACE DIMS. UPDATED.	21/11/2012	PE
PCN	REV.	DESCRIPTION OF CHANGE	DATE	DRAWN
REVISIONS				

PRODUCT/ASSEMBLY <b>CABLES AND CABLE ASSEMBLIES</b>		DESCRIPTION <b>FME(m) - SMA(m) RG174 COAX CABLE 6m LONG</b>		
MATERIAL <b>N/A</b>		APPROVED KD	DO.CHECK KD	SCALE 1:1
FINISH <b>N/A</b>		DIMENSIONS IN mm		
WEIGHT 97g		SHEET 1 OF 1		