
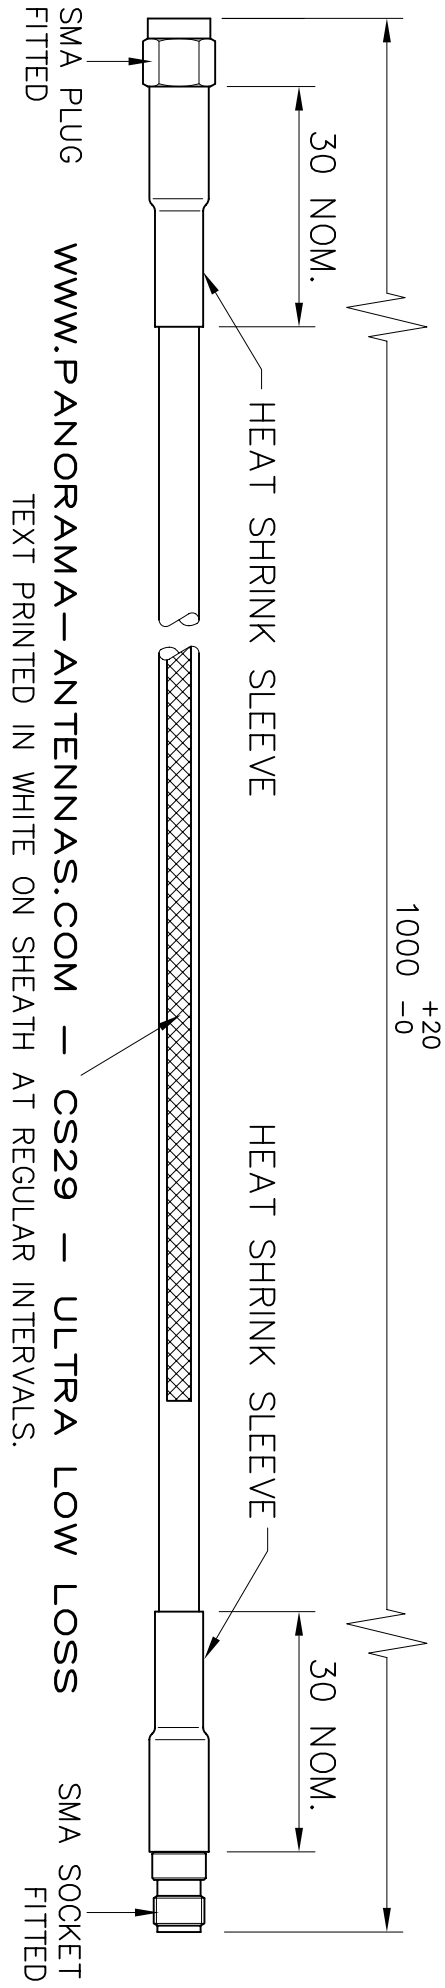


CABLE	TERMINATION	LENGTHS-DIAMETERS		
		STEP 1	STEP 2	STEP 3
URM76	SMA	L1 5.5	φ1 3.6	L2 7.1
				L3 2.84
				φ3 10.6
				0.98

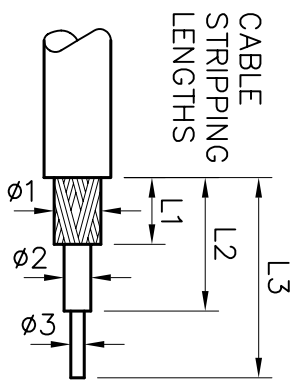

- SPECIFICATION VALUES
- CHARACTERISTIC IMPEDANCE: -
50Ω ±2Ω AT 1GHZ.
50Ω ±4Ω AT 2GHZ.
 - ATTENUATION: -
NO GREATER THAN 3dB PER 10m AT 1 GHZ.
NO GREATER THAN 4.5dB PER 10m AT 2GHZ.
 - BRAID RESISTANCE PER 10m LESS THAN 160mΩ

01019	1	27.02.13	K.D.	TOLERANCES UNLESS OTHERWISE STATED 0 DEC. PLACE ±0.5 2 DEC. PLACES ±0.1 1 DEC. PLACE ±0.2 ANGULAR ±1°	TITLE SMA PLUG - SMA SOCKET 1m CS29 COAX CABLE ASSEMBLY
				MATERIAL	DRAWN A.G.
				FINISH	DO.CHECK K.D.
					SCALE 1:1
					DIMENSIONS IN mm
					PANORAMA ANTENNAS

C/NOTE ISSUE DATE APPROVAL

THIS IS A PROPRIETARY ITEM OF PANORAMA ANTENNAS LTD. AND COULD BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. THIS ITEM IS ROHS COMPLIANT.