




OUTER JACKET: -  
 FLAME RETARDANT  
 ZERO HALOGEN  
 ALPHAGARY  
 MEGOLON S540-UV-B

400-600 SPACES BETWEEN PRINTING

FRZH PANOR

WHITE TEXT TO BE PRINTED ON BLACK CABLE SHEATH AT REGULAR INTERVALS AS SHOWN

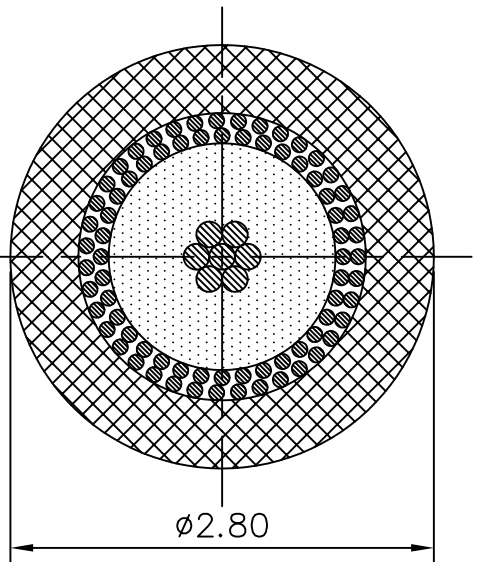

CROSS SECTION THROUGH CABLE SCALE - 20:1

SPECIFICATION VALUES: -

1. CHARACTERISTIC IMPEDANCE - 50Ω @ 1GHZ
2. ATTENUATION:- NO GREATER THAN 1.1 dB/m MAX. AT 1 GHZ.1.3 dB/m MAX. AT 2 GHZ.
3. MAXIMUM PEAK VOLTAGE:- 1.5KV DC.
4. BRAID RESISTANCE PER 10m - LESS THAN 350mΩ

NOTES: -

1. OUTER SHEATH MUST BE U.V. LIGHT STABILISED.
2. ALL PARTS MUST BE ROHS COMPLIANT.

01019	1	05.02.10	K.D.	TOLERANCES UNLESS OTHERWISE STATED 0 DEC. PLACE ±0.5 2 DEC. PLACES ±0.1 1 DEC. PLACE ±0.2 ANGULAR ±1°	TITLE 50 Ω COAX CABLE RG174 FIRE RETARDANT ZERO HALOGEN - BLACK
C/NOTE	ISSUE	DATE	APPROVAL	MATERIAL	DRAWN P.E.
				FINISH	DO.CHECK K.D.
					SCALE N.T.S.
					DIMENSIONS IN mm