

Low PIM Ultra Low Profile SiSo Ceiling Antenna

CMSLP-038-4



- Ultra Low Profile
- Siso UHF/3G/4G/5G Antenna
- Flame Retardant Materials
- Low PIM Construction

The CMSLP-038-4 range has been designed to provide SiSo UHF/3G/4G & 3.8GHz 5G coverage for DAS networks in an ultra low profile package. The compact, robust low-profile housing contains a highly efficient antenna element covering 380-520/617-960/1710-3800MHz.


At < 22mm (0.85") high the antenna is extremely discreet and ideal for low clearance deployment locations.

The antenna is designed to be ceiling mounted and can be fitted on any non- conductive panel. Supplied with integrated flame retardant low PIM RG402 cable and a flame retardant radome the antenna is suitable for many environments.



This product features Panorama Antennas' PIM Guard Technology and will meet or exceed a third order inter-modulation level of > -150dBC (2x 20W carrier)*

Technical Drawing

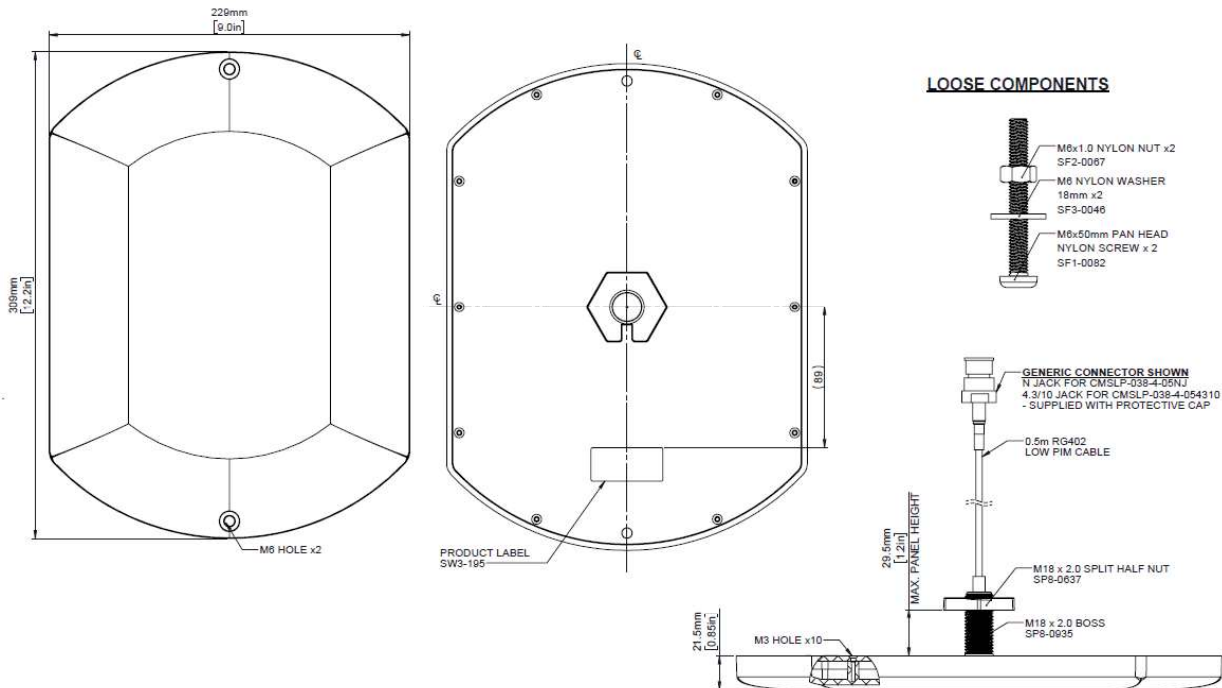

Low PIM Ultra Low Profile SiSo Ceiling Antenna

PANORAMA ANTENNAS

CMSLP-038-4

Product Data

Part No.		CMSLP-038-4-05NJ	CMSLP-038-4-054310
Electrical Data			
Frequency Range (MHz)		380-3800	
Peak Gain:	380-520MHz	2	
Isotropic †	617-960MHz	4	
	1710-3800MHz	4	
Pattern		Omni-directional	
Typical VSWR		<2.2:1	
Passive intermod. (2x20W, 3rd ord.) dBc*		< -150	
Nominal Impedance		50Ω	
Max input power (W)		50	
Mechanical Data			
Dimensions (mm)	Length	309 (12.2")	
	Height	229 (9.0")	
	Depth	21.5 (0.85")	
Operating Temp (°C)		-40° / +80°C (-40° / 176°F)	
Material		FR ABS	
Colour		White	
Typical Weight (g)		780	
Mounting Data			
Fixing		Panel Mount - 18mm (3/4") / 2x 6mm (1/4") Screws	
Max Panel Thickness		29.5mm (1.2")	
Cable Data			
2G/3G/4G Cables	Cable Type	402 Low PIM Flame Retardant Cable	
	Diameter (mm)	4 (0.16")	
	Length (m)	0.5(1'6")	
	Termination	N (f)	4.3-10 (f)

† Peak gain simulated with no ground plane and excluding cable loss


* Typical VSWR stated as measured with 0.5m (1.5+) of cable

Low PIM Ultra Low Profile SiSo Ceiling Antenna

CMSLP-038-4


Electrical Data

Typical VSWR *

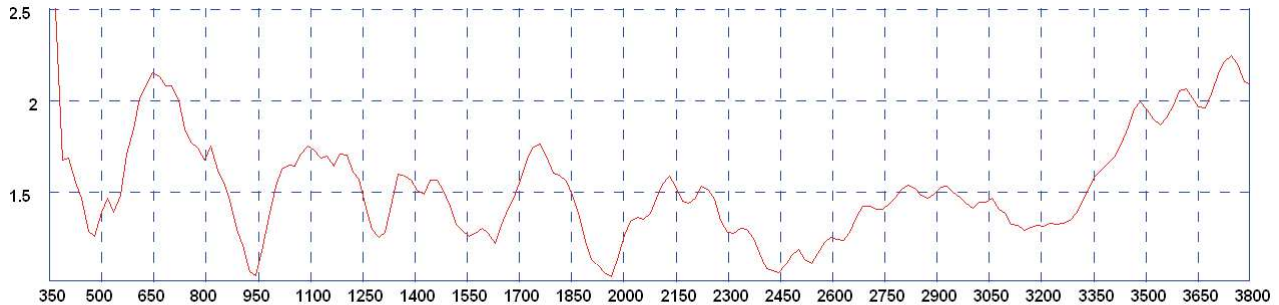


* VSWR measured with 0.5m (1.5') of RG402 cable and no ground plane


Typical 3D Pattern- Side (400MHz)




Typical 3D Pattern- Side (500MHz)




Typical 3D Pattern- Side (700MHz)

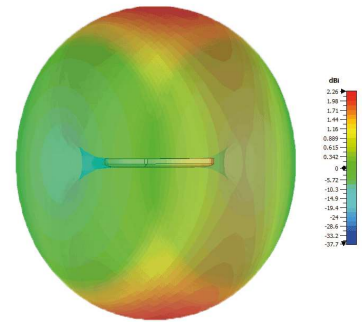


Typical 3D Pattern- Side (800MHz)

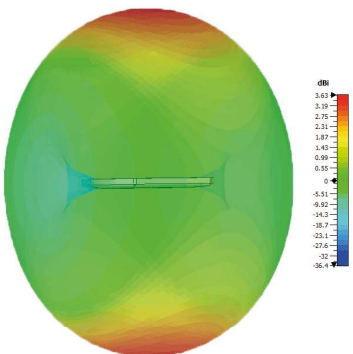


Typical 3D Pattern- Side (900MHz)

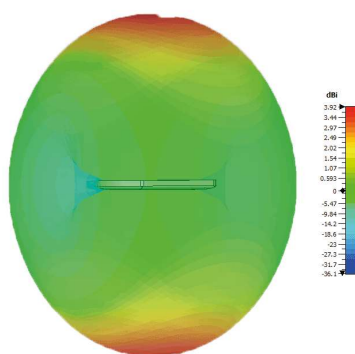


Typical 3D Pattern- Side (1800MHz)

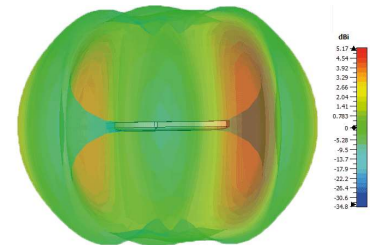


Typical 3D Pattern- Side (2000MHz)



Typical 3D Pattern- Side (2600MHz)

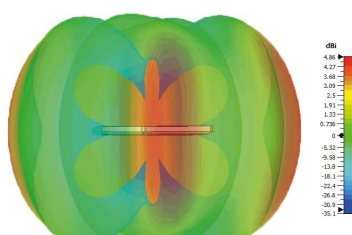

Typical 3D Pattern- Side (3600MHz)

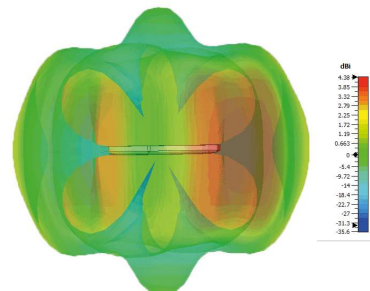

3D patterns simulated in CST Microwave Studio with no ground plane and excluding cable loss

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.