



ATTB Antennentechnik
Bad Blankenburg

4578.01




Glasklebe- Innenantenne

Glasklebe-Innenantenne zur Klebefestigung an der Frontscheibe (1) oder an Seitenscheibe (2) mit folgenden Eigenschaften:

- Rundfunkempfang, aktiv und rauscharm für **AM/FM**
- **DAB +** Empfang, aktiv und rauscharm in dem Bereich B III
- Einfache und schnelle Installation
- diebstahlsicher und sicher vor mutwilliger Zerstörung
- lange Lebensdauer
- bestens geeignet zum Anschluss an nachgerüstete digitale Autoempfänger mit Phantomspeisung der Antenne
- Bei **AM**-Empfang Anschluss an Fahrzeugmasse (GND) erforderlich

Hinweise:

- 5 mm Mindestabstand zwischen Antenne und Karosserie
- beschichtungs-, partikel- und heizdrahtfreie Scheibe im Montagebereich
- Montage vertikal oder horizontal möglich

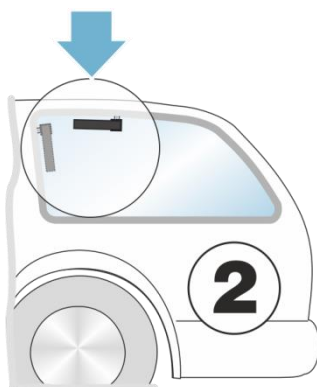


Glas Mount Indoor Antenna

An internal glass mount antenna for adhesive mounting on the car windscreen (1) or on side panes (2) with the following functions:

- Active and low noise **AM/FM** receiving
- Active and low noise **DAB +** receiving B III
- Quick and easy installation
- Theft-proof and secure from destruction
- Long product life
- Suitable for use with the digital car radio aftersales market with phantom power supply to the antenna
- For AM reception, connection to vehicle ground (GND) is required

Advices:

- The antenna should be mounted in a location that allows at least 5 mm between antenna and vehicle body
- For best performance avoid locating the antenna in areas which have heating wires or tinted areas of glass
- Vertically or horizontally mounting possible

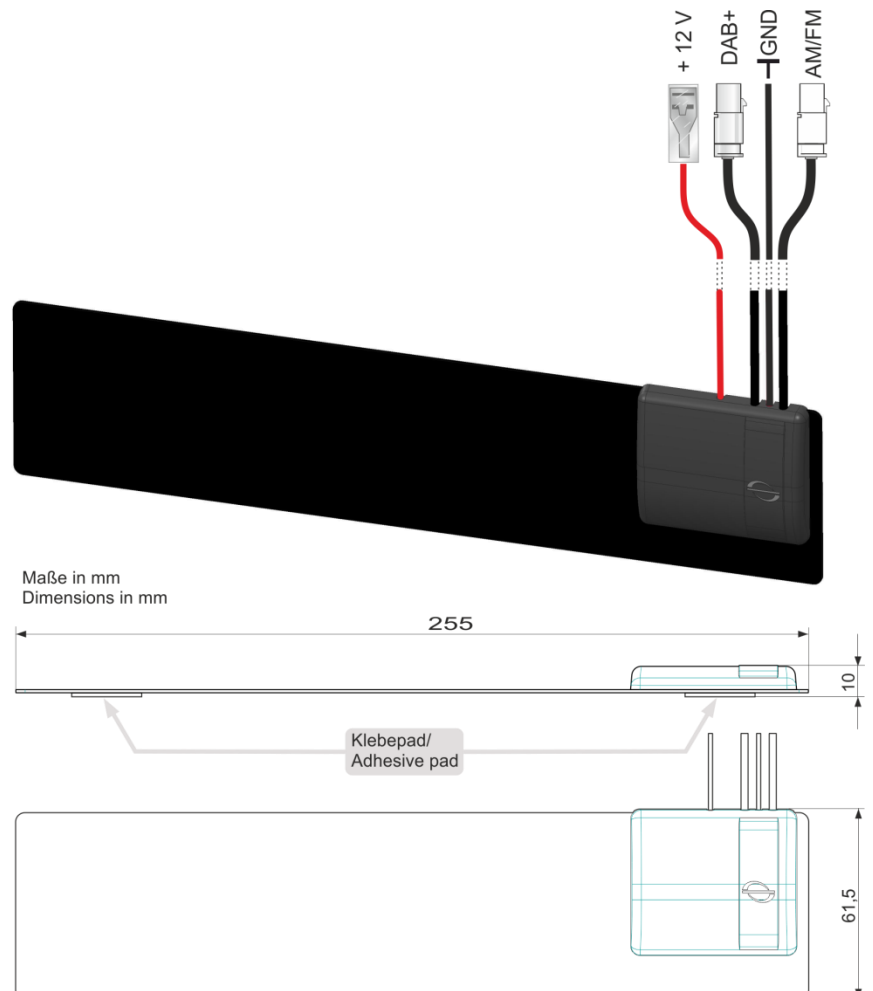

Irrtümer und technische Änderungen vorbehalten / Errors and technical changes reserved

Desay SV Automotive Europe GmbH • In der Buttergrube 3-7 • 99428 Weimar-Legefild

Internet: www.attb.de

E-Mail: info@attb.de

Tel.: +49 3643 4771 - 0

Fax: +49 3643 4771 - 190



4578.01

Frequenzbereich	Frequency Range	AM	FM	DAB+
Frequenz	Frequency	531 - 1602 kHz	87,5-108 MHz	174-240 MHz
Verstärkung	Amplification	0 ± 3 dB	10 ± 3 dB	15 ± 3 dB
Gewinn	Gain	n.a.	0 ± 2 dBi	0 ± 2 dBi
Impedanz	Impedance	50 Ω		
Anpassung	VSWR	≤ 2,0 : 1		≤ 2,0 : 1
Rauschmaß, typ.	Noise Figure, typ.	n.a.	3,5 dB	2,0 dB
Phantom oder externe Stromspeisung	Phantom or extern Power Supply	+8,0 V ...+12,0 V 45...75 mA		
Kabel RG174	Cable RG174	300 mm		300 mm
Steckverbinder	Connector	FAKRA (m)-B		FAKRA (m)-G
Spannungsanschluss	Power supply	300 mm; Flachsteckhülse 6,3/0,8 300 mm; flat plug sleeve 6,3/0,8		
Masseanschluss	Ground termial	300 mm		