

4570.02 FM, DAB, DAB+ (Band III/L-Band)

Glasklebe-Innenantenne

Aktive Glasklebe-Innenantenne zur Klebefestigung an der rechten oder linken Seite der Frontscheibe oder an Seitenscheiben mit folgenden Eigenschaften:

- günstige Empfangseigenschaften
- diebstahlsicher und sicher vor mutwilliger Zerstörung
- keine Windgeräusche
- lange Lebensdauer
- bestens geeignet zum Anschluss an nachgerüstete digitale Autoempfänger

Hinweise:

- 0...5 mm Mindestabstand zwischen Antenne und Karosserie
- beschichtungs-, partikel- und heizdrahtfreie Scheibe im Montagebereich



Glass Mount Indoor Antenna

An active glass mount internal antenna for adhesive mounting on the right or left side of windscreen or on side panes with the following features:

- Favourable reception properties
- Theft proof and secure from destruction
- No wind noise
- Long product life
- Suitable to use with retrofitted digital receivers

Advices:

- The antenna should be mounted in a location that allows at least 5 mm between antenna and vehicle body
- For best performance avoid locating the antenna in areas which have heating wires or tinted areas of glass

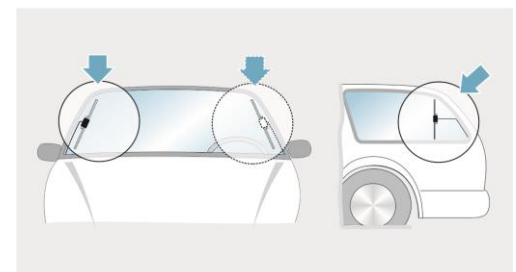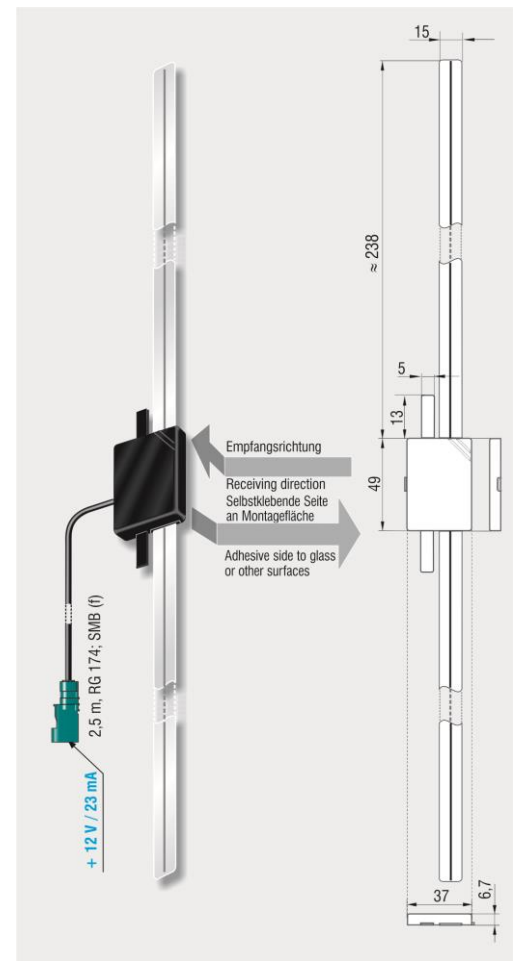

Frequenzbereich	Frequency Range	FM	B III	L-Band
Frequenz	Frequency	87,5-108 MHz	174-230 MHz	1452-1492 MHz
Impedanz	Impedance	50 Ω		
Gewinn	Gain	0 dBi	2 dBi	2 dBi
Anpassung	VSWR	≤ 2,0 : 1		
Verstärkung LNA	Amplification LNA	14 dB	10 dB	0 dB, passiv
Rauschmaß	Noise Figure	3,5 dB typ.	2,0 dB typ.	k.A. n/a
Stromversorgung Phantom	Power Supply Phantom	+9...16 V, 23 mA bei/ at 12 V		k.A. n/a
Kabel RG 174	Cable RG 174	≈ 2,5 m		
Steckverbinder	Connector	FAKRA (f)-Z		